

Smart, Reliable, Future-proof

The ParkAdvance™ Cashless
Paystation is easy to configure and
to maintain. ParkAdvance™ hardware
features subscriber functionality,
various identifiers, Automatic Number
Plate Recognition, privilege cards
and value cards. The ParkAdvance™
Cashless Paystation has a fully
customisable user interface as well
as many other features.





ParkAdvance™ Cashless Paystation

Specifications

Display

Diagonal screen size: 7 inch Wide

Backlight

Colours: 16,2 million

Resolution: 800 x 480

Type: LCD

Sleep mode reduces 20% energy

Communication

Optional 2-way voice intercom

Optional 1-way video intercom

Connection

TCP-IP

Dimensions

Packaging type: FSC approved re-usable pallet box

Product weight:

Terminal: 40kg / 88 lbs

Product dimensions (WxDxH): 600mm x 500mm x 1304mm

Payment methods

Contactless

Credit card / Debit card

Power

Power supply 230V / 110V

Cooling fan: 230V / 110V

Heater: 400W - 230V / 110V

Safety

1/2-channel detector 230V / 110V

Tamper alarm

Door contact

Euro cylinder lock

Software

WPS ParkiD™

WPS ParkiD™ Cloud

Departure

Deister PRD4

MIFARE

NEDAP

Receipt printer: X56

Certifications

PCI-DSS / PA-DSS

Green specification


20% energy reduction due to standby functionality

Thermostat standard temp 15°C

FSC approved receipt paper

Standard

- Aluminium housing
- 7" LCD full-colour display in entry/exit/cc terminals
- Intercom prepared or installed
- Modular design
- · Standard cabinet colour: RAL 7021

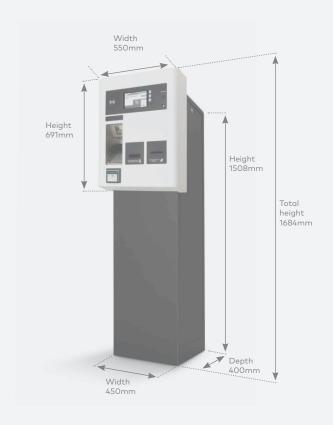

Optional

- · Face Plate available in different colours
- · Automatic Number Plate Recognition
- Barcode reader / 2d scanner type: Access
- Passcard acceptor (TAU) (Optional LED ticket mouth)
- Proximity readers: Deister, Nedap
- Integration of 3rd party readers in modules
- Country specific chip & pin unit
- · Credit card reader
- Plinth 120mm / 380mm
- Built in Switch

















